

## C3 Domed Indicator lamp



- Ø30mm diameter Dome
- Robust designs, Bright and uniform
- Three colors in one device and five colors to choose from
- Translucent ivory Lens, eliminating false Indication from ambient light when off
- Cabled and quick-disconnect model available
- All models have flashing input control
- Models rated to IP67 and IP69K for use in harsh environments

### Specifications



Mounting Hole Diameter	Φ 22mm
Input Voltage	12VAC/DC ;24VAC/DC
Functions	Constant/flashing
Material	Base: Aluminium(anodized), Lens: PC,Nut-PA66
Output	NPN/PNP
Connection	M12 connector (Additional cable) / 1.5M cable
Operating Temperature	-25℃ □ +55℃ □ No Freezing□
Storage Temperature	-40℃ □ +70℃ □ No Freezing□
Storage Humidity	40 ~ 85%RH □ No condensation□
Vibration Resistance	10 ~55Hz,Amplitude 0.75mm
Installation Category	Direct Mounting Rod Mounting

### Order code

Shape	Color style	light form	Code		Note
			M12 connector	1.5m Cable	
Ø30mm Domed	Single-color	Constant	C312Q-▲	C312-▲	Color Code of LED as follows: R: RED Y: Yellow G: Green B: Blue W: White
		Flashing	C311Q-▲	C311-▲	
	Bi-color	Constant	C322Q-▲	C322-▲	
		Flashing	C321Q-▲	C321-▲	
	Tri-color	Constant	C332Q-▲	C332-▲	
		Flashing	C531Q-▲	C331-▲	

•Color-code for lighting is "▲" in the model number .  
R: red, Y: Yellow, G: Green, B: Blue, W: White

## Outline Dimensional drawing(mm)

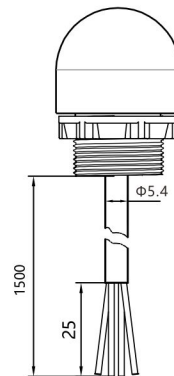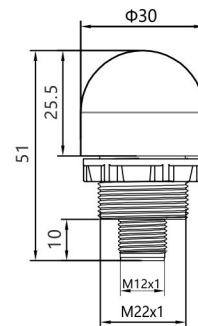

## quick connector (M12)





## 1.5m Cable



### Pinout & Wiring diagram (Tri-color 4P)

## Pinout (Female) &amp; wire color



## NPN/PNP

