

Ø50mm Signal Tower Light




- Re-designed lens and improved module construction delivering bright, even light for visibility from further distances.
- Modular design and Removeable screwless terminal simplifies the wiring process
- Built-in Buzzer ,optional 85dB at 1m
- Available in of black housing and transparent Lens
- M12 connector for easy installation
- IP67 water and dust resistance
- NPN/PNP open-collector.



Specification

Outline Size	Φ 50mm
Input Voltage	12VAC/DC ;24VAC/DC;110V AC;220V AC
Function Available	Bright,Flashing,Buzzer
Material	Lens-PC, Body-ABS; M30-Aluminum,
LED Unit Tiers	5 tiers
LED Unit Color	Red,Green,Yellow,Blue,White
Work Temperature	-15°C ~ +40°C (No Freezing)
Store Temperature	-20°C ~ +70°C (No Freezing)
Humidity	40 ~ 85%RH (No condensation)
Vibration resistance	10 ~ 55Hz, Amplitude 0.75mm
Installation category	Direct Mount:M30 nut or 3-point hole mounting
	Pole mount :L-bracket;circular bracket; folding bracket
Protection class	IP67

Dimension (mm)

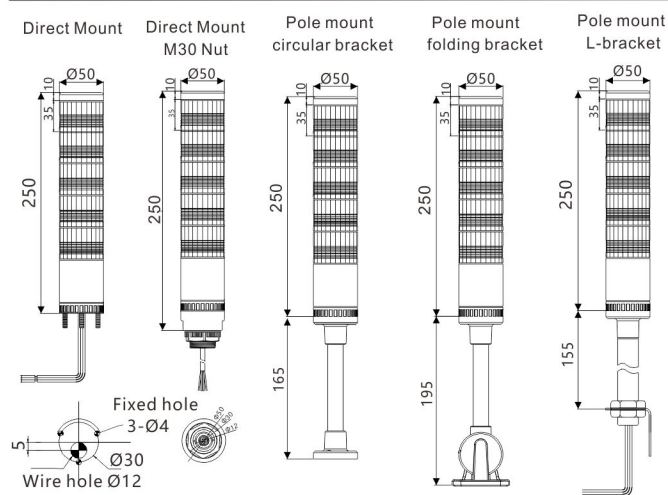

Ordering code

Mounting mode	Tiers	Code		
		Bright	Bright+Flashing+buzzer	Bright+buzzer
Direct Mount (W)	1	TLM5S-1▲-□-W	TLM5S-1▲A-□-W	TLM5S-1▲B-□-W
	2	TLM5S-2▲-□-W	TLM5S-2▲A-□-W	TLM5S-2▲B-□-W
	3	TLM5S-3▲-□-W	TLM5S-3▲A-□-W	TLM5S-3▲B-□-W
	4	TLM5S-4▲-□-W	TLM5S-4▲A-□-W	TLM5S-4▲B-□-W
	5	TLM5S-5▲-□-W	TLM5S-5▲A-□-W	TLM5S-5▲B-□-W
Pole mount with circular bracket (P)	1	TLM5S-1▲-□-P	TLM5S-1▲A-□-P	TLM5S-1▲B-□-P
	2	TLM5S-2▲-□-P	TLM5S-2▲A-□-P	TLM5S-2▲B-□-P
	3	TLM5S-3▲-□-P	TLM5S-3▲A-□-P	TLM5S-3▲B-□-P
	4	TLM5S-4▲-□-P	TLM5S-4▲A-□-P	TLM5S-4▲B-□-P
	5	TLM5S-5▲-□-P	TLM5S-5▲A-□-P	TLM5S-5▲B-□-P
Pole mount with folding bracket (Z)	1	TLM5S-1▲-□-Z	TLM5S-1▲A-□-Z	TLM5S-1▲B-□-Z
	2	TLM5S-2▲-□-Z	TLM5S-2▲A-□-Z	TLM5S-2▲B-□-Z
	3	TLM5S-3▲-□-Z	TLM5S-3▲A-□-Z	TLM5S-3▲B-□-Z
	4	TLM5S-4▲-□-Z	TLM5S-4▲A-□-Z	TLM5S-4▲B-□-Z
	5	TLM5S-5▲-□-Z	TLM5S-5▲A-□-Z	TLM5S-5▲B-□-Z
Direct Mount M30 nut (M)	1	TLM5S-1▲-□-M	TLM5S-1▲A-□-M	TLM5S-1▲B-□-M
	2	TLM5S-2▲-□-M	TLM5S-2▲A-□-M	TLM5S-2▲B-□-M
	3	TLM5S-3▲-□-M	TLM5S-3▲A-□-M	TLM5S-3▲B-□-M
	4	TLM5S-4▲-□-M	TLM5S-4▲A-□-M	TLM5S-4▲B-□-M
	5	TLM5S-5▲-□-M	TLM5S-5▲A-□-M	TLM5S-5▲B-□-M
Pole mount with L-bracket (K)	1	TLM5S-1▲-□-K	TLM5S-1▲A-□-K	TLM5S-1▲B-□-K
	2	TLM5S-2▲-□-K	TLM5S-2▲A-□-K	TLM5S-2▲B-□-K
	3	TLM5S-3▲-□-K	TLM5S-3▲A-□-K	TLM5S-3▲B-□-K
	4	TLM5S-4▲-□-K	TLM5S-4▲A-□-K	TLM5S-4▲B-□-K
	5	TLM5S-5▲-□-K	TLM5S-5▲A-□-K	TLM5S-5▲B-□-K

▲ Reference to Voltage code 02: 24VACDC, 22: 100V~250VACDC

□ Reference to LED color code R: red, Y: Yellow, G: Green, B: Blue, W: White from top to bottom

※ Available with transparent lens and black body (special order)

● Add [C] after the LED unit tiers and add [U] before the mount mode in the order model