

## S16 Key Switches



- $\Phi 16\text{mm}$
- Material: SUS304
- Switch rating: 3A for 250VAC
- Contact: 1NO+1NC
- 2 Position
- IP67
- IEC/EN 60947-5-1,  
IEC/EN 60073, IEC/EC 60529

### Contact arrangement①

11=1NO+1NC

### Switching action②

Blank =Momentary T=Maintained

### Mounting Dimensions and styles


16F= $\Phi 16\text{mm}$ +Flat

### Ordering code


Shape	Switching action	Contact	Code	Note
Flat (F)	Momentary	1NO+1NC	S16F-11Y	
	Maintained	1NO+1NC	S16F-11YT	

PS: Except for the listed products models, Special and Customized Products are available. please consult the factory for more details.

### Outline Dimensional drawing<sub>mm</sub>

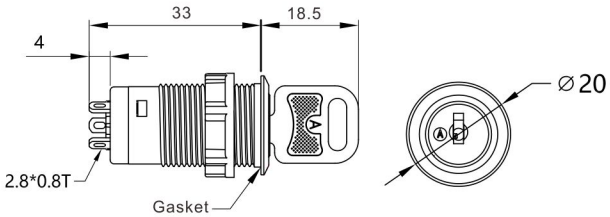

Panel Thickness: 1 ~ 10mm



(Bottom View)

