

S22 Buzzer, Buzzer with lamp



- $\Phi 22\text{mm}$
- Housing made of SUS 304 stainless steel
- High resistance to vibration and impact
- Continuous sound and intermittent sound are available
- Illuminated Buzzer are available
- Optional 85dB / 1M

Mounting Dimensions and styles

22F= $\Phi 22$ + Flat
22E= $\Phi 22$ + Raised
22G= $\Phi 22$ + Flat/wide-brimmed

Terminal

L=Solder/Plug-in (2.8*0.5)
S=PCB (1.2*0.7)

LED color②

R = Red

Voltage①




12=12VAC/DC 24=24VAC/DC

Ordering code

Shape	LED	Part No.	Terminal	Note
Flat (F)	without LED	S224F-F□①	In place of □ insert terminal as follows:	In place of ① insert voltage from table
Raised (E)		S224E-F□①		
Flat/wide-brimmed (G)		S224G-F□①		
Flat (F)	with LED	S224F-FI□①R	L:Solder/Tab#110 S:PC Board	
Raised(E)		S224E-FI□①R		
Flat/wide-brimmed(G)		S224G-FI□①R		




PS: Except for the listed products models, Special and Customized Products are available. please consult the factory for more details.

Outline Dimensional drawing_{mm}

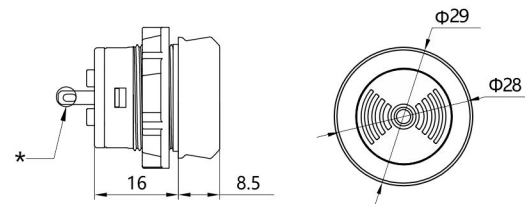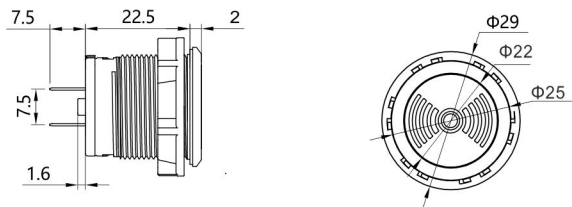


* Solder/Plug-in Terminal

Bottom View



PCB Terminal

Mounting size



* Optional limit hole

