S25
Illuminated selector switch, Illuminated key switch

25FU

25FU

- Ring-illuminated
- SUS316L stainless steel are available
- High resistance to vibration and impact
- 2-position or 3 position options
- High IP67/69K protection
- Oiltight model are available
- Single or bi-color LEDs available
- Quickly connector and PCB connector are available
- TÜV CE RoHS

Mounting Dimensions and styles

25FU=Φ25Flat+Ring

Contact

11=1NO+1NC	10 =1NO
20=2NO	01 =1NC
02=2NC	

Switching Action

Blank =Momentary T=Maintained

Terminal

L=Solder/Tab #110 (2.8*0.5)
S= PC Board (1.2*0.7)

Voltage①

06=6VAC/DC	110=110VAC/DC
12=12VAC/DC	220=220VAV/DC
24=24VAC/DC	

Color②

R= Red	Y= Yellow
G= Green	W= White
B= Blue	A=Amber

Outline Dimensional drawingmm

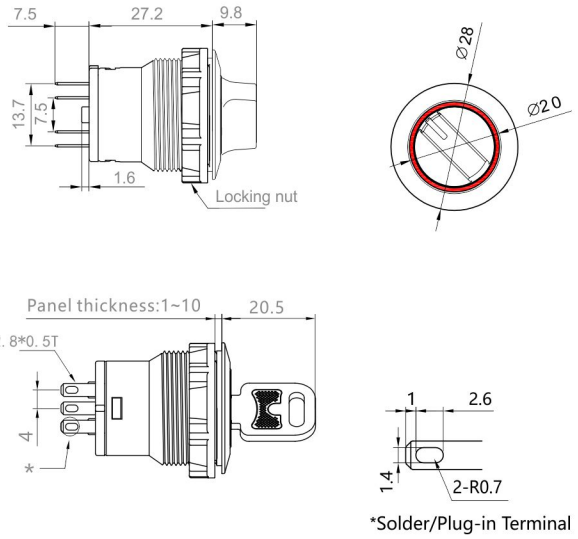

*Solder/Plug-in Terminal

- Mounting Hole Layout & Mini Mounting spacing Reference P32
- Quick connection are possible ,The wire length of quick connection on request.

Buttom View



Ordering code

Shape	Switching Action	Contact	Part No. 2-Position	Part No. 3-Position	Note
Illuminated Selector Switches (Flat+ring)	Momentary	1NO+1NC	S22FU-11X2□①②	S22FU-11X3□①②	
		2NO	S22FU-20X2□①②	S22FU-20X3□①②	
		2NC	S22FU-02X2□①②	S22FU-02X3□①②	
	Maintained	1NO+1NC	S22FU-11X2T□①②	S22FU-11X3T□①②	
		2NO	S22FU-20X2T□①②	S22FU-20X3T□①②	
		2NC	S22FU-02X2T□①②	S22FU-02X3T□①②	
Illuminated Key Switches (Flat+ring)	Momentary	1NO+1NC	S22EU-11Y2□①②.▲	S22EU-11Y3□①②.▲	
		2NO	S22EU-20Y2□①②.▲	S22EU-20Y3□①②.▲	
		2NC	S22EU-02Y2□①②.▲	S22EU-02Y3□①②.▲	
	Maintained	1NO+1NC	S22EU-11Y2T□①②.▲	S22EU-11Y3T□①②.▲	
		2NO	S22EU-20Y2T□①②.▲	S22EU-20Y3T□①②.▲	
		2NC	S22EU-02Y2T□①②.▲	S22EU-02Y3T□①②.▲	

1. in place of ① insert voltage table
2. in place of ②insert color table
3. in place of ▲insert key removable position table

Terminal Arrangement

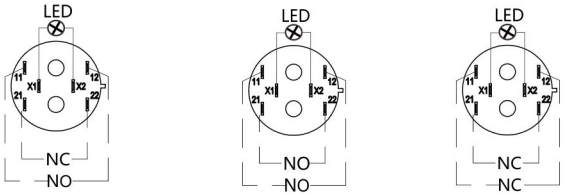

❑ Operators position

Positions	code	operators style	Key removable position(.▲): ①、②、③
90°-2P	T	Maintained	a ① ②
	Blank	Spring return	b ①
45°-3P	T	Maintained	a ① ③ ②
	Blank	Spring return	b ❶ ③ ❷