

S30
Illuminated pushbuttons



- Illuminated Pushbuttons
- SUS316L stainless steel are available
- High resistance to vibration and impact
- Quickly connector and PCB connector are available
- Laser Markings are available for any symbol or text in any language
- High IP67/69K protection
- Oilight model are available
- Single or bi-color LEDs available

△ TÜV CE RoHS

Mounting Dimensions and styles

30FU=Φ30Flat+Ring
30FD=Φ30Flat+Lens
30FM=Φ30Flat+standby

Switching Action

Blank =Momentary T=Maintained

Contact

11=1NO+1NC 10 =1NO
20=2NO 01 =1NC
02=2NC

Terminal

L=Solder/Tab #110 (2.8*0.5)
S=PC Board (1.2*0.7)

VoltageⓄ

06=6VAC/DC 110=110VAC/DC
12=12VAC/DC 220=220VAV/DC
24=24VAC/DC

ColorⓄ


R= Red Y= Yellow
G= Green W= White
B= Blue A=Amber

Ordering code

Shape	Switching action	Contact	Part No.	Terminal	Note
Flat+ Ring (Fu)	Momentary	1NO+1NC	S30FU-11□①②	*In place of □ insert terminal as follows: L:Solder/Tab#110 S:PC Board	In place of ① insert voltage and② Led color from tab
		2NO	S30FU-20□①②		
	Maintained	2NC	S30FU-02□①②		
		1NO+1NC	S30FU-11T□①②		
Flat+ Lens (FD)	Momentary	2NO	S30FD-20□①②		
		2NC	S30FD-02□①②		
	Maintained	1NO+1NC	S30FD-11T□①②		
		2NO	S30FD-20T□①②		
Flat+ Standby (FM)	Momentary	2NC	S30FD-02T□①②		
		1NO+1NC	S30FM-11□①②		
	Maintained	2NO	S30FM-20□①②		
		2NC	S30FM-02□①②		

PS: Except for the listed products models, Special and Customized Products are available. please consult the factory for more details.

Outline Dimensional drawing_{mm}

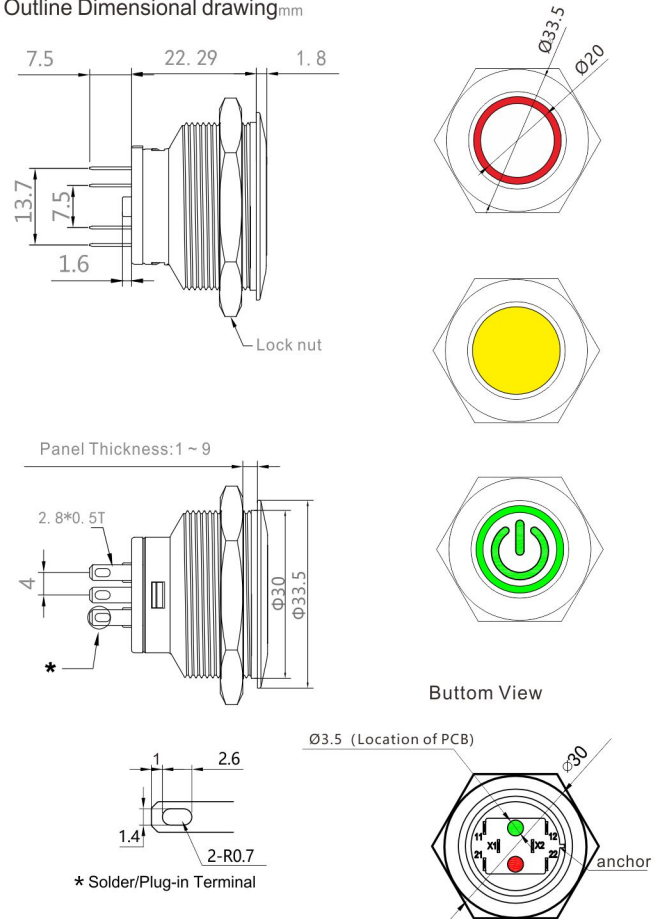

- Mounting Hole Layout & Mini Mounting spacing Reference P32
- Quick connection are possible ,The wire length of quick connection on request.

Terminal Arrangement

