

S22

Pushbuttons



- $\Phi 22\text{mm}$
- Housing made of SUS304 stainless steel
- High resistance to vibration and impact
- Quickly connector and PCB connector are available
- Laser Markings are available for any symbol or text
- High IP67/69K protection
- Oiltight model are available
- RoHS

Switching action

Blank =Momentary T=Maintained

Contact arrangement

11=1NO+1NC 20=2NO
02=2NC

Terminal

L=Solder/Plug-in (2.8*0.5)
S=PCB (1.2*0.7)

Mounting Dimensions and styles

22F= $\Phi 22+$ Flat
22E= $\Phi 22+$ Raised
22G= $\Phi 22+$ Flat/wide-brimmed


Ordering code

Shape	Switching action	Contact	Part No.	Terminal	Note
Flat (F)	Momentary	1NO+1NC	S22F-11□	In place of □ insert terminal as follows: L:Solder/Tab#110 S:PC Board	
		2NO	S22F-20□		
		2NC	S22F-02□		
	Maintained	1NO+1NC	S22F-11T□		
		2NO	S22F-20T□		
		2NC	S22F-02T□		
Raised (E)	Momentary	1NO+1NC	S22E-11□		
		2NO	S22E-20□		
		2NC	S22E-02□		
	Maintained	1NO+1NC	S22E-11T□		
		2NO	S22E-20T□		
		2NC	S22E-02T□		
Flat/wide-brimmed (G)	Momentary	1NO+1NC	S22G-11□		
		2NO	S22G-20□		
		2NC	S22G-02□		
	Maintained	1NO+1NC	S22G-11T□		
		2NO	S22G-20T□		
		2NC	S22G-02T□		




PS: Except for the listed products models, Special and Customized Products are available, please consult the factory for more details.

Outline Dimensional drawing_{mm}


Flat style

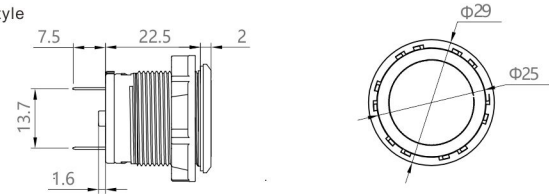

Raised style

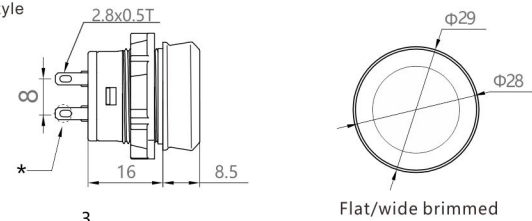


PCB Terminal



* Solder/Plug-in Terminal

Bottom View



- Mounting Hole Layout & Mini Mounting spacing Reference P32
- Quick connection are possible ,The wire length of quick connection can be customized

Terminal Arrangement

