S19
Pilot lamp

- Φ19mm
- Translucent face appears gray when off, to avoided false indication from ambient light.
- Si-color,Bi-color,Tri-color are available
- Models rated to IP68 and IP69K for use in harsh environments
- M12 connector are available
- Available with PNP or NPN input, depending on model

Mounting dimensions and styles

19FH=19mm+flat/convexe
19RH=19mm+flat/Extended

Voltage①

06=6VAC/DC
12=12VAC/DC
24=24VAC/DC
110=110VAC/DC
220=220VAV/DC

Color②

R= Red
G= Green
B= Blue
Y= Yellow
W= White
A=Amber
RG= Red/Green
YG= Yellow/Green
GB= Green/Blue
RY= Red/Yellow
RB= Red/Blue
RGY= Red/Green/Yellow
RGB= Red/Yellow/Blue

Ordering code

Shape	Terminal	Code		Note
		Convexe	Extended	
Flat (F)	Solder/plug-in	S19FH-L①②	S19RH-L①②	Reference the tables①②
	M12 connector	S19FH-M①②	S19RH-M①②	

Outline Dimensional drawing mm

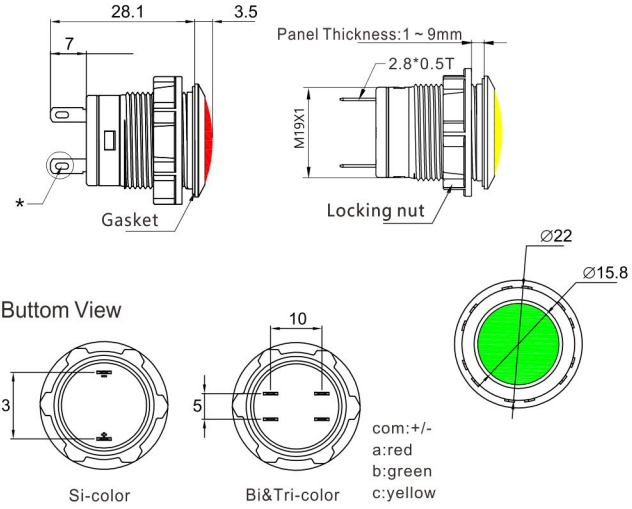

●Mounting Hole Layout & Mini Mounting spacing reference to P32

工图电气有限公司
Goto Electrical CO.,LTD