

S22
Illuminated Selector Switches



- Ring-illuminated
- SUS316L stainless steel are available
- High resistance to vibration and impact
- 2-position or 3 position options
- High IP67/69K protection
- Oiltight model are available
- Single or bi-color LEDs available
- Quickly connector and PCB connector are available
- TÜV CE RoHS

Mounting Dimensions and styles

- 22F=Φ22Flat+Ring
- 22E=Φ22Raised+Ring
- 22G=Φ22Flat/wide-brimmed+Ring

Switching Action

Blank =Momentary T =Maintained

Contact

11=1NO+1NC	10 =1NO
20 =2NO	01 =1NC
02 =2NC	

Terminal

L=Solder/Tab #110 (2.8*0.5)
S= PC Board (1.2*0.7)

Voltage

06=6VAC/DC	110=110VAC/DC
12=12VAC/DC	220=220VAV/DC
24=24VAC/DC	

Color


R= Red	Y= Yellow
G= Green	W= White
B= Blue	A=Amber

Ordering code


Shape	Switching Action	Contact	Part No.		Terminal
Flat+Ring (FU)	Momentary	1NO+1NC	S22FU-11X2□①②	S22FU-11X3□①②	•In place of □ insert terminal as follows: L:Solder/Tab#110 S:PC Board
		2NO	S22FU-20X2□①②	S22FU-20X3□①②	
		2NC	S22FU-02X2□①②	S22FU-02X3□①②	
	Maintained	1NO+1NC	S22FU-11X2T□①②	S22FU-11X3T□①②	
		2NO	S22FU-20X2T□①②	S22FU-20X3T□①②	
		2NC	S22FU-02X2T□①②	S22FU-02X3T□①②	
Raised+Ring (EU)	Momentary	1NO+1NC	S22EU-11X2□①②	S22EU-11X3□①②	
		2NO	S22EU-20X2□①②	S22EU-20X3□①②	
		2NC	S22EU-02X2□①②	S22EU-02X3□①②	
	Maintained	1NO+1NC	S22EU-11X2T□①②	S22EU-11X3T□①②	
		2NO	S22EU-20X2T□①②	S22EU-20X3T□①②	
		2NC	S22EU-02X2T□①②	S22EU-02X3T□①②	
Flat/wide-brimmed+ring (GU)	Momentary	1NO+1NC	S22GU-11X2□①②	S22GU-11X3□①②	
		2NO	S22GU-20X2□①②	S22GU-20X3□①②	
		2NC	S22GU-02X2□①②	S22GU-02X3□①②	
	Maintained	1NO+1NC	S22GU-11X2T□①②	S22GU-11X3T□①②	
		2NO	S22GU-20X2T□①②	S22GU-20X3T□①②	
		2NC	S22GU-02X2T□①②	S22GU-02X3T□①②	

1. in place of ① insert voltage table
2. in place of ② insert color table

Outline Dimensional drawing_{mm}

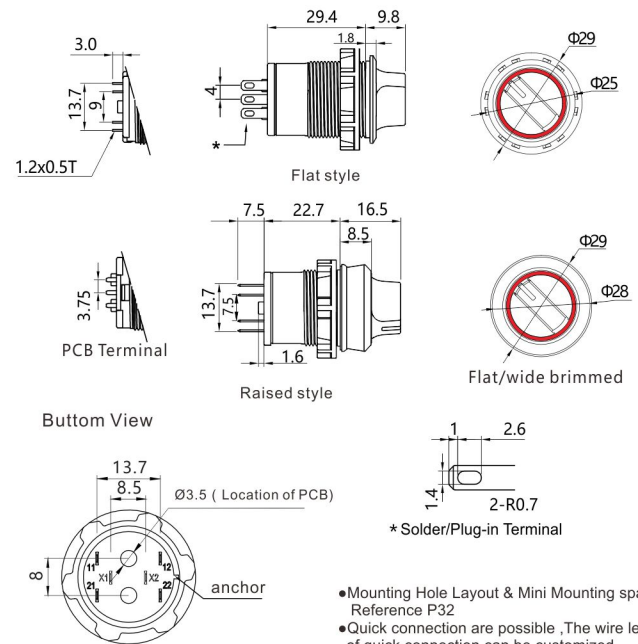

Terminal Arrangement

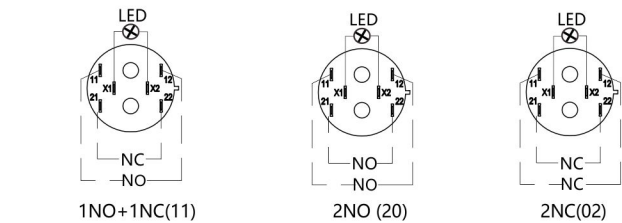

□ Operators position

Positions	code	operators style	Handles position
code X2	T	Maintained	
	90°-2P	Blank	
code X3	T	Maintained	
	45°-3P	Blank	